GRS IX 5]

Previous references. 1924-28 (Mar)

File No. 250-24

Serial Nos. 1-2

Later references.
Proj 32-26-2, 6, 8-11

GENERAL AND REVENUE SECRETARIAT

Serial Nos.
1-2

Part B for April 1925

SUBJECT

Renewal for Rs 3900 for the Renovation in the Siva Chennakesava Temple Belur

GOM 1442-3 dt 4-4-25 to the Mysore Engr & Comptroller re Sanctioning Rs 3900 for the renovation to the Belur Temple

4/5th

4/4/25

G. R S. 11] 1924-25

GENERAL AND REVENUE SECRETARIAT.

(Mug)

NOTES.

File No. 250-U

FILE HEADING.

Renovation of the Chenna Kesava Swami temple at Belur.

From

The Mysore Cmr.

No. C-1138/22/23 Dated 18-3-25 Received 21-3-25

iary No. 1627	Enclos. 4 & 1	Spare Copies.	Serial No. 1

BRIEF ABSTRACT OF LETTER.

Submits for sanction estimate for a total cost of Rs 3900 for certain works connected with the Belur Temple as desired in GOM 511-17/Mg/135-23 dt 13-10-24 & recommends that the Govt, Works & Plant Charges may be waived.

NOTES AND ORDERS.

X Q

In GO No. 511-17/Mg/135-23 dt 13-10-24, Administration sanction was accorded to works costing Rs. 3325 and detailed estimate was called for from the Mug Cmr. Detailed estimate as follows. have now been furnished.

NOTES—First Sheet.

General and Revenue Secretariat.

File No. 251 of 19 24

Serial No.

1. Nayanarkan Mantap Rs 1066.
2. Kappé Chenniyaraja Samudri. - 207
3. Annamanama Samudri. - 567
4. Vahana Mantaps - - 787
5. Veerabhagana Samudri - 65
6. Hora Annamanama Samudri. 23
7. New temple - - - 915

3,721

Contingencies - 179

Total Rs. 3,900

2 The Supt. Engr. further recommends that the Rent, Tolls & Plant Charges may be waived. The Estimate now sub? may be sanct? the Rent Charges being waived in view of the architectural importance of the Mantaps.

3 Pay order sanct? the Estimate sub? & sanct? for Aff? exec? The estimate may be sanct? Aff? for Aff in other cases.

26.3.25

26 (The Supt. Engr. reports that the Kalyana Mantaps may be left as it is, for the present)

5 Rev Sec? for orders. UDS 26/3/25

U.R.A, Find Sig may be communicated

First Member

27.3.25

NOTE—Contn. Sheet

685
28.3

Serial No.

In respect work which on Sanctn from the Statutory Examiner of the Govt Press, I think that the Rule of the Works Circular on may be waived generally. I do any case the charges may be waived in this case for reason mentioned in the Dept note.

I do not think there is objection, the Dept note which is copy may be noted.

30/3

30 3 25

31/3/25

Maybe waived in this Case.

FINANCIAL SECRETARIAT. H 2173 31 MAR 1925

10 The general proposal requires further consideration as waiving produces an unpleasurable effect on the relation betn Works outlay and Contg Establt of the Dept

31-3-25

11 In view of the opinion of the Govt Exam in para 9, the order appl? may be issued. The gen'l question raised with ref appl? be worked up separately.

1/4/25

Noted for file

1/4/25

NOTE—Contn. Sheet

General and Revenue Secretariat.

Mus File No. of 19 24

Serial No. 2

To The Mus Chief Comptroller &
Ch Engr. No. 1442-4 of 4.4.24
Sanctions Est for Rs 3900 for the
renovation of the Bolan Temple, the
Charge being met for the Int Earnings
of the Gen'l Mus Fd & the removing of
the Rails, Tools & Plant Charges, on a
Spl Case.

No. 1445 of 4.4.24 Copies &
Thro Engineer for info

NOTE—Contn. Sheet

B65WD.0531

File No. of 19

General and Revenue Secretariat.

Serial No.	

2996

OFFICE OF THE REVENUE & Muzrai COMMISSIONER
IN MYSORE.

No. C 1138/22-23 one estimate & Report Camp Hassan, ~~Bangalore,~~ 18th March 1925.

FROM

C.S. Balasundaram Iyer Esq., B.A.,
& Muzrai
REVENUE COMMISSIONER/IN MYSORE.

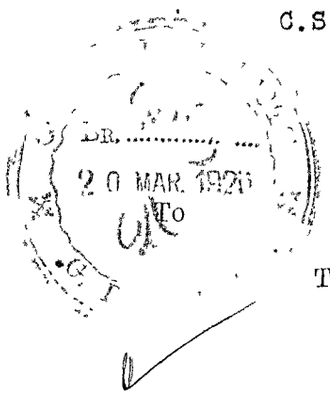



Dr. 1527

TO

THE SECRETARY TO THE GOVERNMENT OF
HIS HIGHNESS THE MAHARAJA OF MYSORE
Revenue DEPARTMENT.

ST 24/3/25

SIR,

Adverting to para 3 of G.O. No. 511-17/M.F.135-23-13 dated 13-10-1924 and subsequent correspondence, I have the honor to submit herewith copy of letter No. 12573 dated 12th March 1925 from the Chief Engineer of Mysore forwarding a detailed estimate for Rs. 3900-0-0 for carrying out urgent repairs to the temple of Sri Chennakesavaswami at Belur, and to state that the report accompanying the estimate explains the nature and extent of the repairs proposed to be done.

2. I beg to recommend that the estimate may be sanctioned, the charge being met from the interest earnings of the General Muzrai Fund as observed in para 5 of the Government Order referred to above. As the entire cost of repairs has to be met from the above source and as the Belur temple has not contributed anything towards the Corpus of the General Muzrai Fund, I beg further to recommend that contribution towards Establishment and Tools and Plant charges may be waived, as a special case.

3. As regards the dismantling of the Malyuda mantapa, it is no doubt true that one of the pillars in the front row has sunk a little and is out of plumb. But, it has been in this condition for quite a long time now and there are no signs that the subsidence is increasing and is likely to cause any danger

damage. The chief objection to the structure appears to be that its general style is not in keeping with that of the rest of the temple and that it is in close proximity to the main temple and obstructs a view of it. It was therefore suggested that the Mantap should be pulled down and re-erected at a corner of the courtyard. Such demolition and re-erection will, I am informed by the Executive Engineer, cost not less than Rs.10,000/-. I fear such a large expense is not warranted at present. If this is not to be undertaken, the Mantap may be left as it is and no repairs are required for it at present. There is an ornamental parapet wall on the top in front with some figures in mortar etc. These figures are broken and chipped off to a large extent and the whole of this parapet wall may perhaps be removed and replaced by a light parapet in keeping with the parapet walls over the rest of the building. But, I am not sure that even this is needed at present.

4. I request that the Comptroller to Government may be authorised to place the amount of the sanctioned estimate at the disposal of the Public Works Department.

5. Estimates for repairing Halebid and Somanathapur temples will be sent as soon as received from the Chief Engineer of Mysore.

I have the honor to be,

Sir,

Your most obedient servant,

C S Balasundaramayya

Muzrai Commissioner.

M.B.R.

Letter No. 12573 dated 12th March 1925 from the Chief Muzrai Engineer of Mysore, to the ~~Revenue~~ Commissioner in Mysore.

Adverting to correspondence ending with your letter No. C. 1138/22-23 dated the 3rd February 1925, I have the honor to forward herewith, for favour of disposal, an estimate amounting to Rs. 3,900 for carrying out urgent repairs to Sri Chennakesavaswami Temple at Belur.

2. The report accompanying the estimate explains the provisions made therein.

3. Detailed estimates for repairing the temples at Halebid and Somanathapur called for from the Executive Engineers concerned have not yet been received. Needful action will be taken on their receipt in this office.

" C o p y "

C S Balasundaramayya

Muzrai Commissioner.

M.B.R.

G.R..S VI G 34]

SUBJECT.....

.....

.....

Diary No. of letter replied to.....

Section Mucz

File No. 250 - 24

Serial No.

General and Revenue Secretariat

( )

, *the* *192*

Proceedings of the Government of His Highness the Maharaja of Mysore.

Date of issue.....

Signed by.....

Read— G.O. No. 511-7 Mucz: 135-25 Dated the 13th October 1924 according ~~sanction~~ to the administrative details & certain works of restoration to the Sri Chenna Kesava Swami temple at Belur & calling for detailed estimate in respect of them.

Letter No. C. 1038 of 25-2-25 from the Mucz Curator in Mysore Submitting for sanction detailed estimate & ~~Tabular statement~~ for the above works Conn? with the Sri temple at a total cost of Rs 30,000 as per the Marginal and recommending the Govt. Work ~~Estimate~~ Marginal ~~Statement~~ & plan & Sketch.

May this be

i Printed ?

ii treated as a standing order ?

iii published in the Gazette.

English Part ?

iv translated ?

v placed at the disposal of the press ?

vi published in the Gazette, Kannada Part ?

~~Order Thereon~~ No.

K.P.O.

Order 1442-4
Mag 250-24-2
& 4 April 1925

The Estimate submitted by the Mag Con at a total Cost of 3900 Rs are sanctioned the charge being met from the Interest earnings of the Endt Mag Fd as directed in para 9 of the G.O read above. In view of the architectural importance of the temple in question, Govt accept the recommendations. The Mag Con are pleased to waive the Govt share of the Plant charges in respect of the Estimate now sanctioned. The Kalyana mantap may as recommended by the Mag Con be left as it is for the present.

	Rs
1. Naganarkan mantap	1066
2. Kappe Chennigaraya Swamy Sannidhi	304
3. Ammanavaru Sannidhi	561
4. Vahana mantap	787
5. Veeranarayana Swamy Sannidhi	65
6. Hosa Ammanavaru Sannidhi	23
7. Main temple	918
	3724
Contingencies	176
Total	3900 -

In compliance with the request of the Chief Engr for the loan of the original estimate for the work now taken on hand as one of unemployment relief scheme, the same is forwarded herewith. The Chief Engr is requested to see that the work is completed and the estimate returned to Govt by 30th June 1925.

By order of the Governor in Council,

[illegible]
Secretary to Government.

To
The Mag Con with the Govt Estimate.
" Comptroller with Copy also for
" Chief Engr in Mysore

List of enclosures.

Copied by

Examined by

WD 1445

WD 1658—GPB—1,000,00—31 12-21

ABSTRACT OF ESTIMATE FOR

Muz 50].

Particulars	Per	Rate	Quantity	Cost
I. Naganaikana Mantapam.				
1. Removing the existing Kadapa slabs.	sqr.	4 . .	1.10	4-0-0
2. Dropping down the existing flooring slabs.	"	5 . .	17.10	5-[illegible]
3. Laying with new kadapa slabs with 3" concrete including levelling &c. complete	"	[illegible]	17.10	[illegible]
4. Providing Kadapa slab flooring on 3" concrete and cement pointing (available slabs)	"	5 . .	1.10	6-0-0
5. Refixing properly the bulged out vertical slabs of the basement &c.		L.	L.	20-[illegible]
6. Grunnkingxwith grating with lime and pointing with cement.	"	8 . .	17.91	[illegible]
7. Dismantling the parapet at the edge of roof &c.	cft.	1	128	12-[illegible]
8. Removing the stone gutters and re-fixing them with cement, concrete and cement plastering	c.	[illegible]	[illegible]	50-[illegible]
9. Cement concrete with cement plastering	cft	1 . .	[illegible]	[illegible]
10. Burnt brick in chunnam	"	6	150	70-0-0
11. Cement plastering	sqr.	[illegible]	[illegible]	[illegible]
12. do on asphalt plastering.	"	10 . .	3.60	[illegible]
13. Scraping old plastering on the roof and plastering with cement coating	"	8 . .	1.80	1-[illegible]
Total				[illegible]
II. Kappe Channigaraya Sannidhi.				
1. Dismantling parapet walls	cft	1 . .	210	15-[illegible]
2. Cement plastering after removing.	sqr	10 . .	[illegible]	36-[illegible]
3. Removing and repairing stone gutters	c	5 . .	[illegible]	[illegible]
4. Cement concrete with cement plastering.	cft	1 . .	[illegible]	3-[illegible]
5. Burnt brick in chunnam	"	6	[illegible]	[illegible]
6. Chunnam plastering.	sqr	5 . .	[illegible]	[illegible]
7. Grating with lime and cement pointing	"	8 . .	2.70	[illegible]
8. Examining the foundation and closing after rectification		[illegible]		[illegible]
Total				[illegible]
III. Ammanavara Sannidhi.				
1. Dismantling parapet roof and covering slabs.	sft	6	[illegible]	[illegible]
2. do reconstructing the wall dismantled.	cft	6	[illegible]	[illegible]
3. Providing raw granite stone slab	sft	1 . .	[illegible]	[illegible]
4. Providing 3 layers of flat tiles on 6" concrete including plastering	sft	4	[illegible]	[illegible]
5. Cement pointing	sqr	[illegible]	1.[illegible]	[illegible]
6. Dismantling masonry.	cft	[illegible]	[illegible]	[illegible]

Sanctioned for Rs.

No dated in Govt Proc

WD 0011 GPB 2.0—5.22

ABSTRACT OF ESTIMATE FOR

Muz 50].

Particulars	Per	Rate	Quantity	Cost
7. Scraping and cement plastering	sqr.	10	5.76	58-0-0
8. Removing and resetting stone gutters.	ft.	5	16	80-0-0
9. Cement concrete and cement plastering	cft	1	3	3-0-0
10. Burnt brick in mortar	"	6	240	0-0-0
11. Chunam plastering	sqr	5	3.84	19-0-0
12. Fitting the crevices with brick in cement and chunam plastering	cft	1	24	24-0-0
13. Dismantling and reconstructing burnt brick in chunam	"	6	228	60-0-0
14. Plastering and closing the crevices				20-0-0
Total				614-0-0
IV. Vahana Mantapam				
1. Providing 25% new slabs 4½" thick and paving them with old slabs on 3" concrete.	sft	5	1	0-5-0
2. Providing and fixing new slabs 4½" thick on 3" concrete.	sft	5	4.56	21-0-0
3. Pointing with mortar and cement.	sqr	4	22.55	101-0-0
4. Dismantling masonry	cft	1	140	11-0-0
5. Scraping and replastering with cement on asphalt	sqr	10	3.60	36-0-0
6. Removing and refixing the old gutters.	ft.	5	10	50-0-0
8. ~~Cement concrete~~ Brick in mortar	cft	1&10	120	61-0-0
8. ~~Brick in mortar~~ Cement concrete	"	1	2	2-0-0
9. Chunam plastering	sqr	5	3.0	15-0-0
Total				297-0-0
V. Veeranarayana Sannidhi.				
1. Providing teakwood panelled door complete.	sft	3 4	211	55-0-0
2. Cement plastering	sqr	10	96	10-0-0
Total				65-0-0
VI. Hosa Ammanavara Sannidhi.				
1. Scraping and plastering with cement	"	10	1.76	18-0-0
2. Grating with cement			3.	6-0-0
Total				24-0-0
VII. Main temple				
1. Paving old slabs on 3" concrete with required new slabs.	sqr	30	16.40	492-0-0
2. Repairs to leaks and removal of plants				10-0-0
3. Providing cast iron collapsible gates				300-0-0
4. Resetting steps with jelly backing with required new slabs	"	30	70	21-0-0
5. Resetting flooring slabs on 3" concrete with required new slabs.		30	40	12-0-0
6. Providing a strong wood ladder (18 long)				30-0-0
Total				15-0-0
Grand total				1,360-0-0

Sanctioned for Rs.

No dated Superintendent, Mysore Branch. in Govt.Pros.

WD 06JJ GPB 250-3-8-22